


Complete Range of Water Pumps Powered by **Honda** Engine


- Highly effective mechanical seal made with special carbon ceramics provides extra durability.
- Entire unit is protected by sturdy rollover pipe frame.
- Strong and lightweight die-cast aluminum pump.



■ Performance Curve

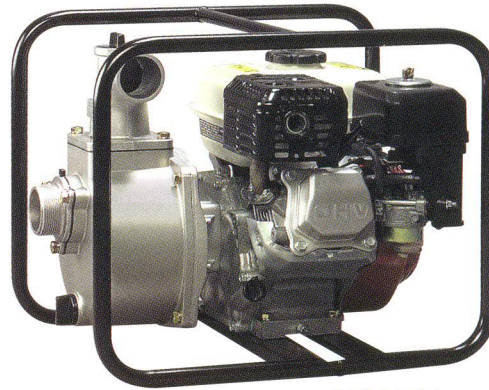

SEH-50X

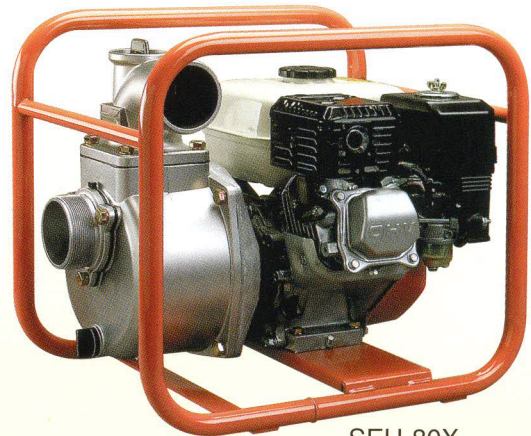

SEH-80X

■ Specifications

Model	SEH-50X		SEH-80X		SEH-100X	
PUMP	Connection Dia	50 mm (2")		80 mm (3")		100 mm (4")
	Connection Thread			Outer Pipe Thread		
	Total Head	30 m (98 ft)		26 m (85 ft)		28 m (92 ft)
	Delivery Volume	600 L/min (158 USG/min)		930 L/min (246 USG/min)	970 L/min (256 USG/min)	1450 L/min (383 USG/min)
	Max. Suction Head	8 m (26 ft)				
Type	Forced Air Cooling 4 Stroke Gasoline Engine					
Model	Honda GX120	Honda G200	Honda GX160	Honda G200	Honda GX240	
Exhaust Volume	118 cc	197 cc	163 cc	197 cc	242 cc	
ENGINE	Rated Output	2.1 kW (2.9 PS) / 3600 rpm	2.8 kW (3.8 PS) / 3600 rpm	2.9 kW (3.9 PS) / 3600 rpm	2.8 kW (3.8 PS) / 3600 rpm	4.4 kW (6.0 PS) / 3600 rpm
	Max. Output	2.6 kW (3.5 PS) / 3600 rpm	3.7 kW (5.0 PS) / 3600 rpm	3.6 kW (4.9 PS) / 3600 rpm	3.7 kW (5.0 PS) / 3600 rpm	5.3 kW (7.2 PS) / 3600 rpm
	Fuel	Automotive Unleaded Gasoline				
	Fuel Tank Capacity	2 L	4.3 L	3.1 L	4.3 L	5.3 L
	Continuous Operating Time	Approx. 2 hrs	Approx. 3 hrs	Approx. 2 hrs 10 min	Approx. 3 hrs	Approx. 2 hrs 30 min
Starting Method	Recoil Starter					
Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set					
Gross Weight	24 kg	29 kg	34 kg	32 kg	59 kg	
Dimensions LxWxH (mm)	493 x 377 x 415	527 x 429 x 535	530 x 399 x 473	527 x 429 x 535	680 x 487 x 684	
Packing Unit	1					