


Scan this to view our product online.



CW CABLE GLAND



RAIDEN CW part type brass indoor and outdoor cable gland is used with all types of single wire armour (SWA) cable providing mechanical cable retention and electrical continuity through armour wire termination. Clamping ring allows the cable to be easily disconnected from the equipment, for maintenance etc. This feature also provides remote make off procedures when the termination is to be conducted in areas of restricted access. This cable gland is designed and tested as per BS6121:Part1:1989 It meets the requirement of EN 50262:1999

TECHNICAL INFORMATION

| | |
|---------------------------|--|
| Type | : CW |
| Design Specification | : BS 6121: Part1: 1989 |
| Ingress Protection Rating | : IP 54 |
| Standard Gland Material | : Brass |
| Optical Gland Material | : Nickel Plated Brass |
| Cable Type | : Single Wire Armour (SWA) |
| Armour Clamping | : Cable Outer Sheath |
| Available Accessories | : Steel/Brass Locknut, PVC/LSF shroud brass earthtag, nylon washer, |

CABLE GLAND KIT CONTAINS

Gland
Lock Nut
Shroud
Earth Tag
Upto 32mm & 40mm Size





CW CABLE GLAND

Scan this to view our product online.


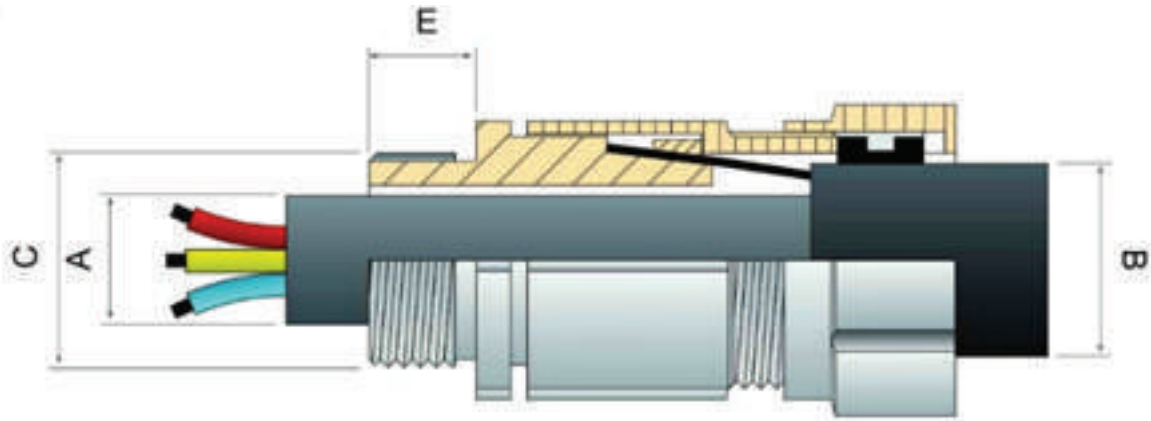


TABLE INFORMATION(MILLIMETER)

| Gland Size | Entry Thread | | Cable Acceptance Detail | | | Across Flat D | Across Corner |
|------------|--------------|------------------|-------------------------|--------------|----------------|---------------|---------------|
| | Dia. C | Length Minimum E | Dia "A" Max | Dia. "B" Max | Armor Diameter | | |
| 20 S | 20 | 10 | 11.60 | 16.00 | 0.90/1.25 | 22.00 | 25.00 |
| 20 L | 20 | 10 | 14.50 | 20.50 | 0.90/1.25 | 25.40 | 28.50 |
| 25 S | 25 | 10 | 19.00 | 24.00 | 1.25/1.60 | 31.50 | 35.50 |
| 25 L | 25 | 10 | 20.50 | 27.00 | 1.25/1.60 | 33.00 | 37.00 |
| 32 S | 32 | 10 | 24.00 | 30.50 | 1.60/2.00 | 38.50 | 43.50 |
| 32 L | 32 | 10 | 27.00 | 33.00 | 1.60/2.00 | 41.00 | 46.50 |
| 40 S | 40 | 15 | 30.00 | 37.00 | 1.60/2.00 | 46.00 | 51.00 |
| 40 L | 40 | 15 | 33.50 | 41.00 | 1.60/2.00 | 48.50 | 55.00 |
| 50 S | 50 | 15 | 40.00 | 47.00 | 2.00/2.50 | 57.00 | 64.00 |
| 50 L | 50 | 15 | 44.00 | 52.60 | 2.00/2.50 | 61.00 | 68.00 |
| 63 S | 63 | 15 | 50.50 | 60.00 | 2.50 | 70.00 | 79.00 |
| 63 L | 63 | 15 | 56.00 | 66.00 | 2.50 | 78.00 | 86.00 |
| 75 S | 75 | 15 | 62.00 | 72.00 | 2.50 | 84.00 | 95.00 |
| 75 L | 75 | 15 | 68.00 | 78.00 | 2.50 | 92.00 | 102.00 |
| 90 L | 90 | 20 | 79.00 | 90.00 | 2.50/3.15 | 105.00 | 118.00 |

All Dimensions are in millimeter

